



RPU-10

RPU-16

RPU-21

RPU-30

Rotating Pulverizer
For 10 to 40 t carriers



Rotating Pulverizer

For 10 to 40 t carriers

Applications:

The Rotating Pulverizers are designed to break construction material and to cut rebars in reinforced concrete.


They can be used for both primary and secondary demolition.

Advantages:

- ▶ 360° continuous hydraulic rotation
- ▶ High clamping force and wide jaw opening for a greater versatility on a wide range of demolition jobsites
- ▶ Increased durability with a complete structure made in Hardox 400
- ▶ Easy maintenance on site with exchangeable teeth, and well protected piping and cylinders
- ▶ Blades for cutting rebars
- ▶ Speed valve for shorter work cycles



MODEL		RPU-10	RPU-16	RPU-21	RPU-30
A	mm	1839	2152	2378	2590
B	mm	1044	1171	1371	1536
C	mm	829	895	895	1110
D	mm	560	740	838	907
F1	ton	100	175	240	305
F2	ton	60	95	120	165
F3	ton	48	60	86	98
G	mm	230	260	310	320
H	mm	360	420	480	490
I	mm	570	790	890	940
Max.Diameter Rebars	mm	30	30	35	40
Rotation Flow	l/min	20	30	30	30
Rotation Pressure	bar	200	190	190	190
Open/Close Flow	l/min	80/120	140/180	180/230	250/300
Open/Close Pressure	bar	320	350	350	350
Rotation	°	360°	360°	360°	360°
Weight	kg	1110	1800	2480	3065
Excavator Weight	ton	10/16	16/23	21/32	30/40

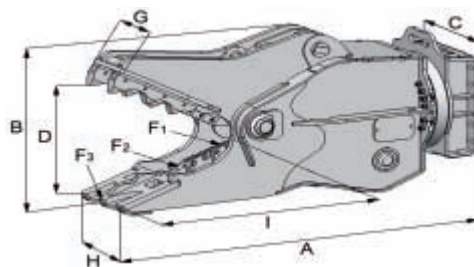

Nothing contained in this brochure is intended to extend any warranty or representation expressed or implied, regarding the products described herein. Any such warranties or other terms and conditions of sale products shall be in accordance with Ingersoll Rand standards terms and conditions of sales for such products, which are available upon request. Specifications and machines can be modified at any time and without notice.



Montabert SAS

203, route de Grenoble
69800 St Priest, France

Tel. +33-(0)4 72 22 97 97 Fax. +33-(0)4 72 22 97 56
montabert_marketing@eu.irco.com

www.montabert.com