



HSS-15

HSS-20

HSS-30

HSS-40

HSS-55

HSS-70

*Hydraulic Steel Shear
For 15 to 100 t carriers*



Hydraulic Steel Shear

For 15 to 100 t carriers

Applications:

The Hydraulic Steel Shear can be used for:




- ▶ Scrap processing
- ▶ Demolition
- ▶ Recycling


Advantages:

The HSS Hydraulic Steel Shear combines extreme versatility, strength, efficiency, and durability, and are available in models suitable for a wide range of carriers from 15 to 100 tons.

- ▶ 360° hydraulic rotation
- ▶ Well protected power cylinder
- ▶ Main cutters can be turned four times
- ▶ Interchangeable teeth
- ▶ Complete structure made in Hardox
- ▶ Strong cutting force
- ▶ Blades with trapezoidal profile



MODEL		HSS-15	HSS-20	HSS-30	HSS-40	HSS-55	HSS-70
A	mm	2627	2870	3265	4010	4465	4700
B	mm	870	925	1062	1240	1470	1500
C	mm	650	650	650	895	895	1110
D	mm	415	460	580	700	840	880
E	mm	329	363	463	556	712	786
Rotation Flow	l/min	30	40	50	50	50	50
Rotation Pressure	bar	120	120	120	120	120	120
Open/Close Flow	l/min	150/250	200/300	280/350	350/500	400/600	500/800
Open/close Pressure	bar	350	350	350	350	350	350
Rotation	°	360	360	360	360	360	360
	mm	50	60	70	85	110	130
	mm	240	300	420	480	540	620
	mm	160	200	260	320	360	420
Operating weight	kg	1650	2230	2990	4100	5600	7200
Excavator weight	t	15/23	21/30	28/35	44/50	50/60	75/100

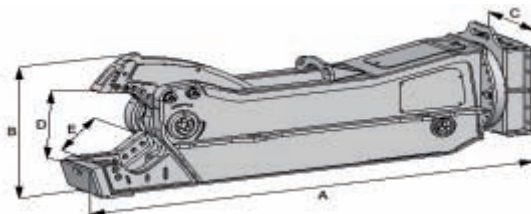

Nothing contained in this brochure is intended to extend any warranty or representation expressed or implied, regarding the products described herein. Any such warranties or other terms and conditions of sale products shall be in accordance with Ingersoll Rand standards terms and conditions of sales for such products, which are available upon request. Specifications and machines can be modified at any time and without notice.



Montabert SAS

203, route de Grenoble
69800 St Priest, France

Tel. +33-(0)4 72 22 97 97 Fax. +33-(0)4 72 22 97 56
montabert_marketing@eu.irco.com

www.montabert.com